

KLINGER® Milam PSS

Mica sheet engineered for demanding operating conditions

KLINGER® Milam PSS is an asbestos-free sealing material with a perforated stainless steel reinforcement. This high temperature, mica- based material is specifically designed to master the rigors of high-temperature sealing applications. It is the preferred choice for utilization scenarios such as exhaust pipes, turbines, turbochargers and fuel lines and can withstand temperatures of up to 1652°F (900°C) in continuous operation.

Because of its excellent chemical resistance to solvents, aggressive acids, alkalis and mineral oils, gaskets from this material can be used in a variety of industries.



TYPICAL VALUES	PSS 130	PSS 150	PSS 300
Compressibility ASTM F 36 J	12 - 20 %	12 - 20 %	17 - 25 %
Recovery ASTM F 36 J	30 - 45 %	33 - 45 %	30 - 40 %
Stress relaxation DIN 52913, 50 MPa, 16 h / 300°C	33 MPa	≤ 33 MPa	30 MPa
Ignition loss DIN 52911	< 5 %	< 5 %	< 15 %
Sealability for nitrogen at 30 MPa and 6 bar, temperature within 100 to 400°C max (sample size 90 x 50 mm)	0.20 ml/min	0.20 ml/min	1.0 ml/min
Thickness increase ASTM F 146 after immersion in Oil IRM 903: 5h /150°C	12 %	12 %	5 %
Weight increase ASTM F 146 after immersion in Oil IRM 903: 5h /150°C	26 %	26 %	28 %
Max. gasket load	100 MPa	-	80 MPa
Density DIN 3754	2.1 g/cm ³	2.1 g/cm ³	1.8 g/cm ³
Continuous operating temperature	900°C max	900°C max	900°C max
Thickness	1.3 mm	1.5 mm	3.2 mm
Number of stainless steel inserts (EN 1.4401/AISI 316 at 0.1 mm thick)	1	1	2
Color	Brown	Brown	Brown

KLINGER® Milam PSS

KEY FEATURES & BENEFITS


- » Excellent chemical resistance
- » Superior high temperature resistance
- » Recommended for exhaust systems
- » Extremely high oxidation resistance
- » Free of fibers

CERTIFICATES & APPROVALS

- » German Lloyd

The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. However, chemical compatibility must also be considered.

pT diagram for thickness 2.0 mm

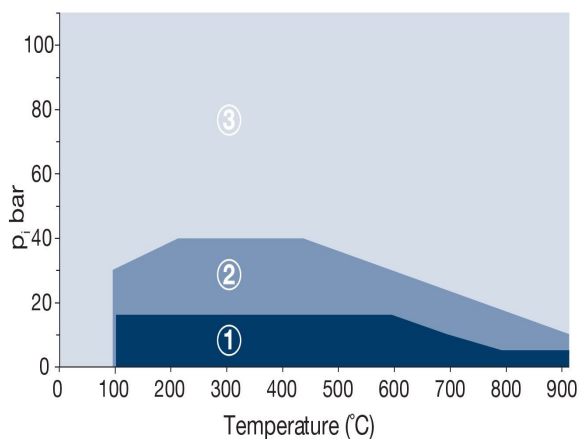

In area ① the gasket material is suitable using common installation practices subject to chemical compatibility.

In area ② appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to KLINGERexpert for assistance.

In area ③ do not install gaskets in these applications without first referring to KLINGERexpert or contacting KLINGER's technical support service.

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled onto the flanges and tightened. These factors are beyond the manufacturer's control.

KLINGER Thermoseal

2350 Campbell Road, Sidney, Ohio 45365
Tel: +1 937 498 2222

3803 S. Sam Houston Parkway W., Houston, Texas 77053
Tel: +1 713 997 8111