


KLINGERSIL® C-4401SS

Universal general purpose sheet

KLINGERSIL® C-4401SS is a universal, general purpose gasket material that offers excellent sealability and chemical resistance along with good creep relaxation characteristics.

This material is manufactured with synthetic fiber reinforced with a nitrile binder.

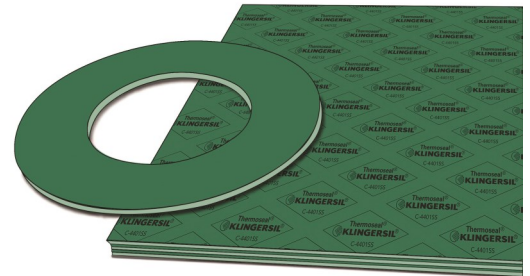

TYPICAL VALUES REFER TO 1/16" THICK MATERIAL UNLESS NOTED


| | |
|--|---|
| Creep relaxation ASTM F38B (1/32") | 20 % |
| Sealability ASTM F37A (1/32") | < 0.3 ml/hr |
| Gas Permeability DIN 3535/6 | < 0.5 ml/min |
| Compressibility ASTM F36J | 7 - 17 % |
| Recovery ASTM F36J | 50 % minimum |
| KLINGER Hot Compression Test | |
| Thickness Decrease 73°F (23°C) | 15 % initial |
| Thickness Decrease 572°F (300°C) | 9 % additional |
| Weight Increase ASTM F146 after immersion in Fuel B, 5h/73°F (23°C) | 15 % maximum |
| Thickness Increase ASTM F146 after immersion in | |
| ASTM Oil IRM 901, 5h/300°F (149°C) | 0 - 5 % |
| ASTM Oil IRM 903, 5h/300°F (149°C) | 5 - 10 % |
| ASTM Fuel A, 5h/73°F (23°C) | 5 - 10 % |
| ASTM Fuel B, 5h/73°F (23°C) | 5 - 10 % |
| Dielectric Strength ASTM D149-95a | 14 kV/mm |
| Density ASTM F1315 | 112 lb/ft ³ (1.8 g/cc ³) |
| Color | Green |

KLINGERSIL® C-4401SS


The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. However, chemical compatibility must also be considered.

pT diagram for thickness 1/16”:

LIQUIDS

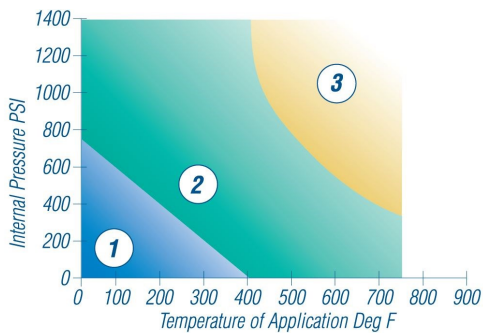

GASES & STEAM

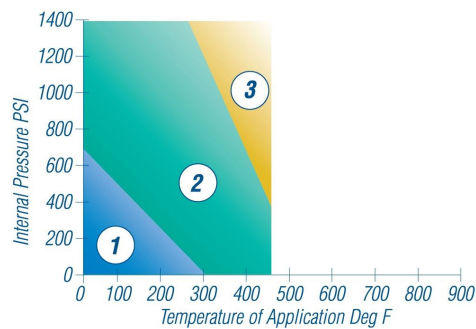

In area ① the gasket material is suitable using common installation practices subject to chemical compatibility.

In area ② appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to KLINGERexpert for assistance.

In area ③ do not install gaskets in these applications without first referring to KLINGERexpert or contacting KLINGER’s technical support service.

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled onto the flanges and tightened. These factors are beyond the manufacturer’s control.

KLINGER Thermoseal

2350 Campbell Road, Sidney, Ohio 45365
Tel: +1 937 498 2222

3803 S. Sam Houston Parkway W., Houston, Texas 77053
Tel: +1 713 997 8111