


KLINGERSIL® C-7400

Chemically resistant sheet also has excellent dielectric strength

KLINGERSIL® C-7400 satisfies both sealing and electrical requirements. C-7400 is resistant to moderate caustics and acids which makes it suitable for paper mills. It can also act as an insulator or barrier to the flow of electrons from one flange to another due to its high dielectric strength.

This material is manufactured with synthetic fiber reinforced with an EPDM binder.

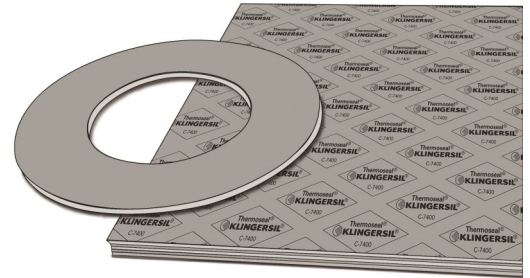

TYPICAL VALUES REFER TO 1/16" THICK MATERIAL UNLESS NOTED


Creep relaxation ASTM F38B (1/32")	20 %
Sealability ASTM F37A (1/32")	< 0.01 ml/hr
Gas Permeability DIN 3535/6	< 0.5 ml/min
Compressibility ASTM F36J	7 - 17 %
Recovery ASTM F36J	50 % minimum
KLINGER Hot Compression Test	<i>tested at 3625 psi gasket stress</i>
Thickness Decrease 73°F (23°C)	15 % initial
Thickness Decrease 572°F (300°C)	15 % additional
Weight Increase ASTM F146 after immersion in Fuel B, 5h/73°F (23°C)	15 % maximum
Thickness Increase ASTM F146 after immersion in	
ASTM Oil IRM 901, 5h/300°F (149°C)	0 - 15 %
ASTM Oil IRM 903, 5h/300°F (149°C)	15 - 30 %
ASTM Fuel A, 5h/73°F (23°C)	0 - 20 %
ASTM Fuel B, 5h/73°F (23°C)	5 - 20 %
Dielectric Strength ASTM D149-95a	22 kV/mm
Density ASTM F1315	94 lb/ft ³ (1.5 g/cc ³)
Leachable Chloride Content FSA Method	200 ppm
ASTM F104 Line Call Out	F712441B4E24K6M5
Color	Gray/White

KLINGERSIL® C-7400


The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. However, chemical compatibility must also be considered.

pT diagram for thickness 1/16”:

LIQUIDS

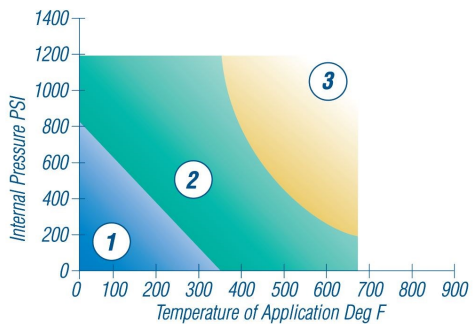

GASES & STEAM

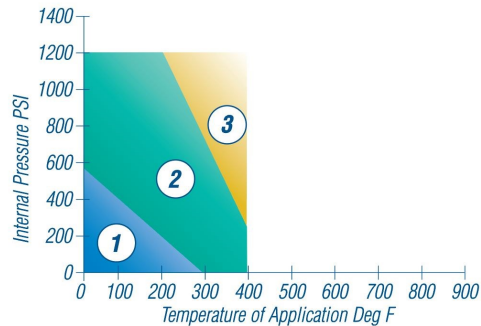

In area ① the gasket material is suitable using common installation practices subject to chemical compatibility.

In area ② appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to KLINGERexpert for assistance.

In area ③ do not install gaskets in these applications without first referring to KLINGERexpert or contacting KLINGER’s technical support service.

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled onto the flanges and tightened. These factors are beyond the manufacturer’s control.

KLINGER Thermoseal

2350 Campbell Road, Sidney, Ohio 45365
Tel: +1 937 498 2222

3803 S. Sam Houston Parkway W., Houston, Texas 77053
Tel: +1 713 997 8111