

KLINGER®tc-1003


Superior performance PTFE sheet with high compressibility

KLINGER®tc-1003 is a high quality, yet cost-effective biaxial oriented modified PTFE gasket material with hollow glass spheres. This material offers superior sealability, excellent torque retention and reduced creep relaxation.

Uses include most chemicals. It also works well on glass-lined flanges. Gaskets cut from this material are exceptionally effective when lower bolt loads are needed to effect a seal.

This material also meets FDA conformity.

Basis: Modified PTFE material with hollow glass spheres.

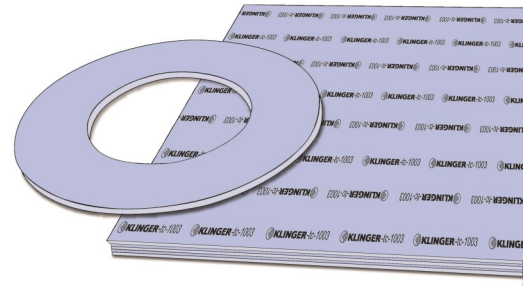

TYPICAL VALUES

Pressure limit	1235 psi
Temperature range	-450°F to 500°F
Compressibility ASTM F36 M	35 %
Recovery ASTM F36 M	45 %
Liquid leakage ASTM F37	< 0.25 ml/hr
Creep relaxation ASTM F38	31 %
Tensile ASTM F152	1885 psi
Density	87 lbs/ft ³
Gas leakage BS7531	< 0.01 mL/min
Dielectric strength ASTM 149	15 kV/mm
Color	Light Blue

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled onto the flanges and tightened. These factors are beyond the manufacturer's control.

KLINGER Thermoseal

2350 Campbell Road, Sidney, Ohio 45365
 Tel: +1 937 498 2222

3803 S. Sam Houston Parkway W., Houston, Texas 77053
 Tel: +1 713 997 8111