


INSULATION KITS

Basic and ISOMAX

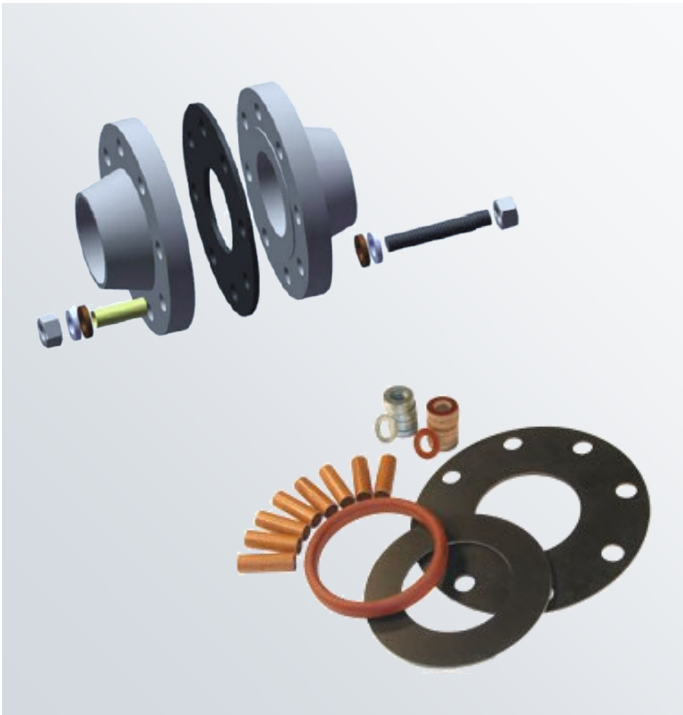

INSULATION KITS

Basic & ISOMAX

Applications

- » Insulation kits are used to provide electrical isolation between the metal surfaces of a flanged joint, by means of eliminating any metal-to-metal contact between the flange face and fasteners.
- » Insulation kits are used where dissimilar metal flanged joints are present in order to eliminate galvanic corrosion effects. These are commonly found where piping spec breaks occur.
- » Insulation kits are also used as part of cathodic protection systems, where electrical currents are required to be confined within certain circuits.

Dimensions

- » Insulation kits are dimensioned to fit all ASME B16.5 flanges, from 1/2" to 24" nominal pipe size, in all pressure classes.
- » Gasket thicknesses:
 - KLINGERSIL® C-4430 1/8"
 - KLINGER®top-chem-2003.... 1/8"
 - ISOMAX LPS..... 1/8"
 - ISOMAX HPS 1/4" (7 mm)
- » Insulating and metal washers are 1/8" thick.

Properties

- » An insulation kit consists of:
 - A full face or ring insulating gasket
 - An insulating sleeve for each bolt
 - Two insulating washers per bolt
 - Two metal washers per bolt

- » Full face gaskets must be used on flat face flanges. Either ring or full face gaskets can be used on raised face flanges. The gasket inside diameter is adjusted to match the bore of the pipe.
- » Kits are provided for different pressure classes as follows:
 - BASIC Class 150
 - ISOMAX LPS Class 300
 - ISOMAX HPS..... Class 6/9/1500

Materials

- » Gasket materials:
 - BASIC KLINGERSIL® C-4430 or KLINGER®top-chem-2003
 - ISOMAX LPS... G10 with PTFE seal
 - ISOMAX HPS... Laminated G10 on metal core with PTFE seal
- » Sleeve materialsNomex or G10
- » Insulating washers...G10
- » Metal WashersZinc coated carbon steel

KLINGER Thermoseal

2350 Campbell Road, Sidney, Ohio 45365
Tel: +1 937 498 2222

3803 S. Sam Houston Parkway W., Houston, Texas 77053
Tel: +1 713 997 8111